



Alternator Models: **KP200IIRS /KP250IIRS /KP270IIRS /KP290IIRS /KP340IIRS /KP370IIRS**

**Ignition-Excite
w/Remote Sense
Alternators**

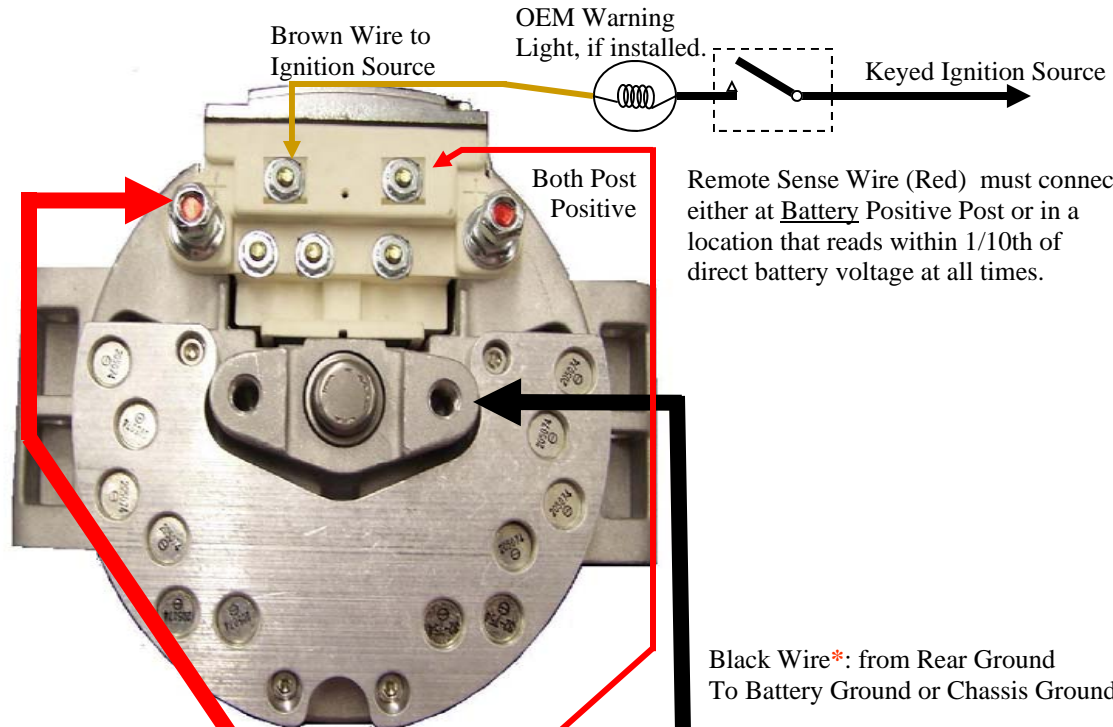

Maximum Amp Load	1 to 10 (Feet)	11 to 15 (Feet)	16 to 20 (Feet)
200 amps	2/0	3/0	4/0
250 amps	3/0	3/0	4/0
300 amps	4/0	4/0	4/0
350 amps	4/0	4/0	N/A
400 amps	4/0	N/A	N/A
450 amps	N/A	N/A	N/A

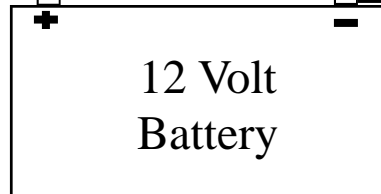

Tech Support
1.318.765.6855
1.318.664.7546
1.214.630.3820

K.E.I. Installation Instructions	
Part # KP Series Above	Date: 30 Aug 09
Style: Internally Regulated 12 Volt Alt. Ignition-Excite w/Remote Sense	
Drawn By: DBA	Approved By:

*Note: Positive and Ground Cables from Alternator and Battery, must be upgraded to at least a minimum size Cable according to chart on this document.